


Engineer: Bruce Page	Date: 7/2/04	 <b>JPS Communications</b> 5800 Departure Drive, Raleigh, NC 27616			
Drawn: Bruce Page	Date: 7/2//04				
Approved: Chris Samios	Date: 7/12/04	Title: ACU RADIO APPLICATION NOTES			
Issued/ Revised	Date: 7/27/04	Size: A	Dwg. #: <b>5961-271276-APP</b>	Rev: <b>A</b>	Sheet: 1            Of    1

**APPLIES TO:** ICOM F30GS Portable

**RADIO MODIFICATIONS:** None required.

**RADIO PROGRAMMING:** Not required

**RADIO CONTROLS:**

1. Adjust the Volume Control until the yellow "SIGNAL" indicator on the associated DSP Module flashes with receive audio. Should be about in the mid-range (12 o'clock) position.

**CABLING:**

Standard ACU-1000 and ACU-T Interface cables are made up of a 2 foot TRP Radio Tray Interface cable and the appropriate 13-foot Extension cable.

ACU-1000 Interface Cable	JPS P/N 5961-291276	(5961-271276 + 5961-261002-00)
ACU-T Cable	JPS P/N 5961-281276	(5961-271276 + 5961-281013-00)
TRP-1000 Shelf Interface Cable	JPS P/N 5961-271276	
RF Connector Type		

**DSP-1 JUMPERS:**

JP1	Low Impedance *
JP2	Balanced *

**DSP PROGRAMMING:**

RX Level	3*	0dBm*
TX Level	6*	0dBm*
Squelch Type	VOX*	
COR Polarity	Active Low*	
High Frequency Equalizer	4*	Flat*
RX Audio Delay	2*	100 ms*
TX Audio Delay (Radio Type)	0*	No Delay*
Noise Reduction Value	0*	Off*
VOX/VMR Threshold	1*	Med1*
VOX/VMR Hang Time	3*	775 ms*
COR Inhibit After PTT	1*	100 ms*
All Others	As needed	


(\* Indicates Default Value)

**NOTES:**

# PURCHASED PART

Rev	ECO	Date
A	C9612-122	7-27-04

OTTO COIL CORD ASSEMBLY V3-10216  
(JPS P/N 0314-310216)

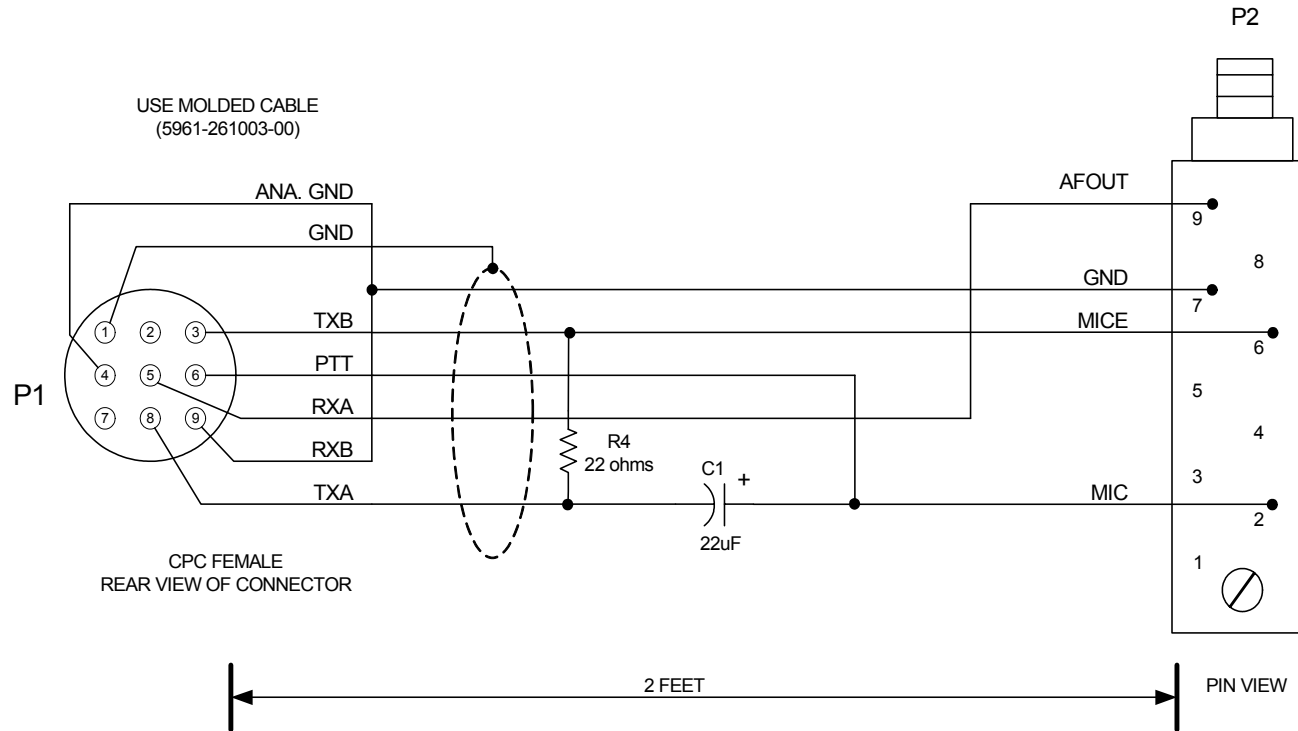

COMPONENT PCB  
(JPS P/N 5961-271000)

C1 JPS P/N 0321-220250  
R4 JPS P/N 1820-220000  
JU2  
JU3  
JU4  
JU6

USED WITH:  
ICOM F30GS PORTABLE

NOTES: SHIELD DRAIN CONNECTED TO PIN 1 OF P1 ONLY.

Designed By: RBP	<b>Raytheon JPS Communications</b> Raleigh, NC USA		
Drawn By: RBP	Title CABLE, CPC TO ICOM F30GS		
Checked By: CTS	Size A	Document Number <b>5961-271276</b>	Rev A
Issued Date		JULY 27, 2004	Sheet <u>1</u> of <u>1</u>

# PURCHASED PART

Rev	ECO	Date
A		



- NOTES: 1) USE BELDEN 9934 SHIELDED CABLE.  
2) CONNECT SHIELD DRAIN TO SHELL OF P1 ONLY.  
3) CONNECTORS P1 AND P2 MUST BE MOLDED TO THE CABLE.  
4) CABLE MUST BE LABELED WITH THE RAYTHEON/JPS P/N AND REV, VENDOR CODE AND DATE (MM/YY).


Designed By: JAC	<b>Raytheon JPS Communications</b>		
Drawn By: JAC	Title CABLE, ACU-1000 RADIO EXTENSION - 13 FT		
Checked By: RBP	Size A	Document Number <b>5961-261002-00</b>	Rev A
Issued Date JANUARY 5, 2004		Sheet <u>1</u> of <u>1</u>	

Rev	ECO	Date
A		

## PURCHASED PART

CONNECTOR AMP P/N 206708-1  
(JPS P/N 0362-005003)  
FEMALE PIN AMP P/N 1-66105-8  
(JPS P/N 0362-005002)

CONNECTOR AMP P/N 206705-4  
(JPS P/N 0362-009001)  
MALE PIN AMP P/N 1-66103-7  
(JPS P/N 0847-000011)

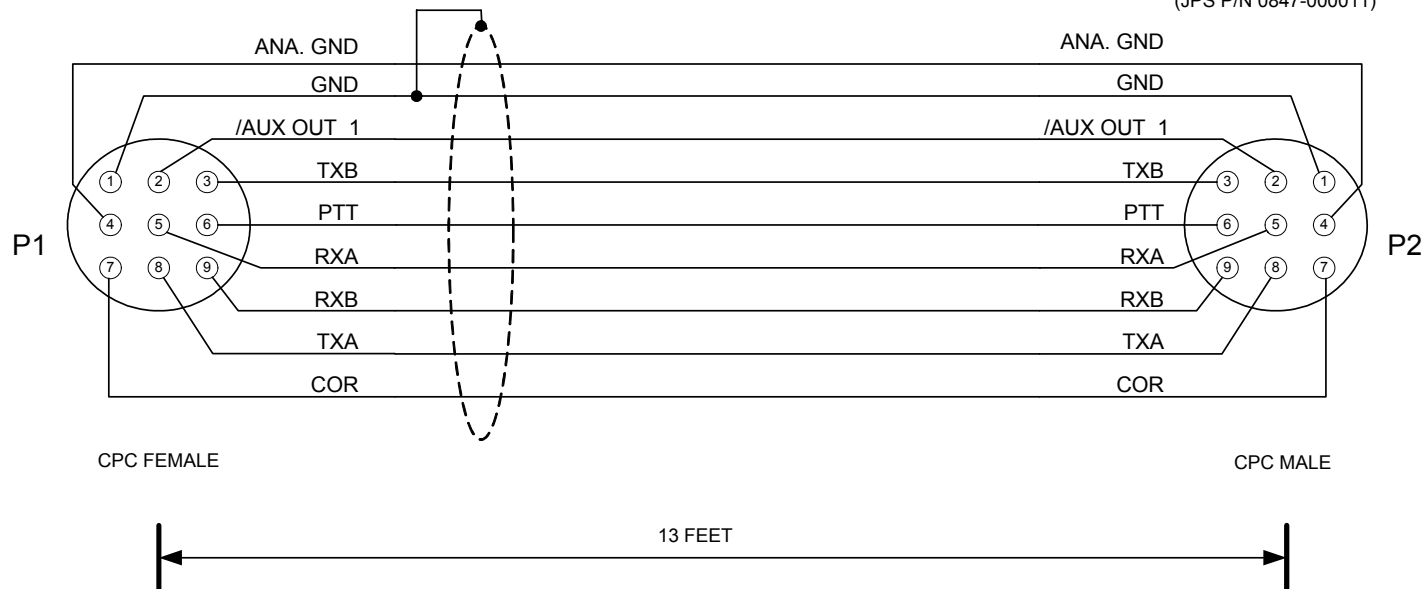

- NOTES: 1) USE BELDEN 9934 SHIELDED CABLE.  
2) CONNECT SHIELD DRAIN TO PIN 1 OF P1 ONLY.  
3) CONNECTORS P1 AND P2 MUST BE MOLDED TO THE CABLE.  
4) CABLE MUST BE LABELED WITH THE RAYTHEON/JPS P/N AND REV, VENDOR CODE AND DATE (MM/YY).

Designed By: JAC	<b>Raytheon JPS Communications</b> Raleigh, NC USA		
Drawn By: JAC	Title CABLE, ACU-T RADIO EXTENSION - 13 FT		
Checked By: RBP	Size A	Document Number <b>5961-281013-00</b>	Rev A
Issued Date JANUARY 5, 2004		Sheet <u>1</u> of <u>1</u>	